
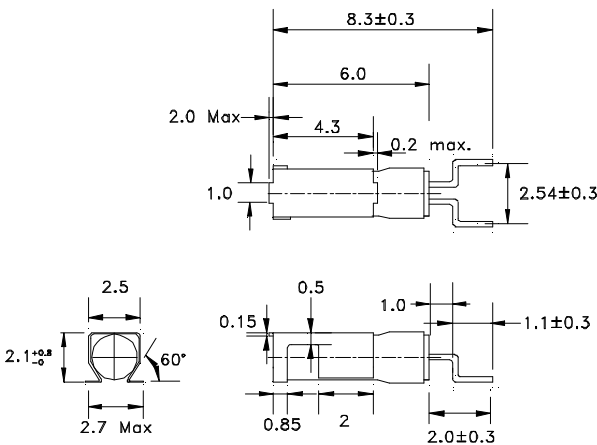
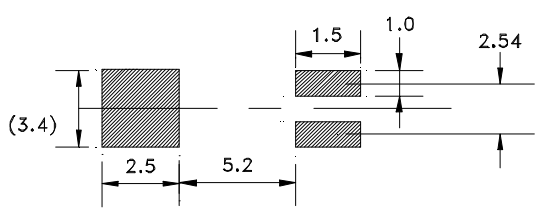


RoHS Compliant

26JT

1000 pcs/reel

 <p style="text-align: center;">2 x 6 mm</p>	<p>■ FEATURES</p> <ul style="list-style-type: none"> • High-density mounting SMD • Automatic mounting and reflowable type
<p>■ DIMENSIONS (mm)</p>	<p>■ SOLDER PAD LAYOUT (mm)</p>
	<p>Recommended Land Pattern</p> 

■ **STANDARD SPECIFICATIONS**

Item	26JT	Conditions
Nominal Frequency	32.768kHz	
Frequency Tolerance	+/- 20ppm	At 25 °C
Load Capacitance	6pF, 12.5pF	
Operating Temperature Range	-40 ~ +85°C	
Storage Temperature Range	-55 ~ +125°C	
Motional (series) Resistance	50 kΩ max.	
Level of Drive	1 μW max.	
Aging (first year)	+/- 5ppm max	
Shunt Capacitance	1.1pF typical	